



High Impact Resistance

- Wind-resistant design
- Double chamber design
- Maximum static load on the front ≥ 5400Pa



Integrated Diverse Applications

- Carport
- Flat-to-pitched Roof Conversion
- Sun Shed



Fast Installation


- Modular design, easy to replace
- Structured integrated drainage



High Power Generation

• High-efficiency Mono PERC cells



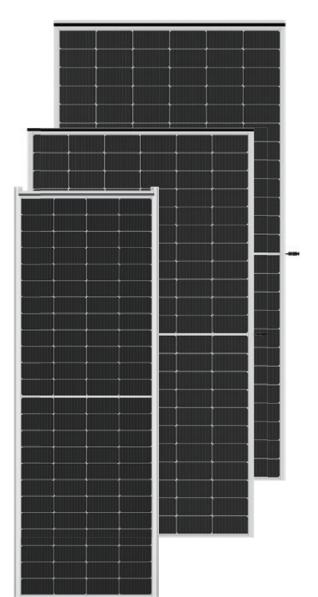

| Structural Data | 505W | 550W |
|---|---------------------|---------------------|
| Size | 2106x1165x25.6mm | 2310x1160x25.6mm |
| Weight | 30kg | 32kg |
| Cell Type | Mono-Si PERC | Mono-Si PERC |
| Electrical Data (STC) STC:AM=1.5, irradiance 1000W/ m², component temperature 25° C | | |
| Max Power (Pmax) | 505W | 550W |
| Voltage at Max Power (Vmpp) | 38.12V | 41.35V |
| Current at Max Power (Impp) | 13.02A | 13.30A |
| Voltage at Open Circuit (Voc) | 45.67V | 49.84V |
| Current at Short Circuit (Isc) | 14.15A | 14.18A |
| Power | 205W/m ² | 200W/m ² |
| Tempurature Coefficient | | |
| lsc | 0.048%/°C | 0.048%/°C |
| Voc | -0.28%/°C | -0.28%/°C |
| PMPP | -0.35%/°C | -0.35%/°C |
| Mechanical Load | | |
| Max Front Side Static Load | 5400Pa | 5400Pa |
| Max Rear Side Static Load | 2400Pa | 2400Pa |
| Carbon Neutral Index (30 yea | ars) | |
| Energy Output | 14990kWh | 16326kWh |
| Equivalent to Standard Coal | 4572kg | 4980kg |
| | | |

8710kg





Carbon Emission Reduction



9486kg

Solar-plus-storage and EV Charging Carport Flat-to-pitched Roof Conversion

Sun Shed